



NEW PRODUCTS 2024

## GEKA® plus automatic hose reel EA15

Advantages / benefits: ..... Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel  
**Suitable for drinking water**  
**Automatic roll-up of the hose locks** 2x per rotation  
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")  
 Gentle hose guide prevents the hose from jumping off the reel during reeling  
**Suitable for wall, floor and ceiling mounting**  
 Hose guide on the axle adjustable in three 45° steps

Material: ..... Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: ..... Max. 20 bar (hose-dependent)

Temperature range: ..... +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: ..... 52 (incl. mount) x 45 x 23,5

Special note: ..... The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm  
 Screws and wall plugs for wall mounting are not included in the scope of delivery  
**Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9) and various supply hoses available separately as an accessory**



Connection	Male thread
Male thread mm	26,44
<b>Male thread</b>	<b>G3/4</b>
Capacity of 1/2" hose approx. m	25
Capacity of 5/8" hose approx. m	24
Capacity of 3/4" hose approx. m	15
Weight approx. kg	14
PU units	1
<b>Article No.</b>	<b>42.9040.9</b>



Robust stainless steel construction



GEKA® plus rotary fitting and stainless steel pipe



Suitable for wall, floor and ceiling mounting

# GEKA® plus automatic hose reel EA15SK

available  
now

## GEKA® plus automatic hose reel EA15SK

Advantages / benefits: ..... Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel  
**Automatic roll-up of the hose locks** 2x per rotation  
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")  
 Gentle hose guide prevents the hose from jumping off the reel during reeling  
**Suitable for wall, floor and ceiling mounting**  
 Hose guide on the axle adjustable in three 45° steps  
**With 12,5 m GEKA® plus water hose WS500 3/4"**, Wall thickness 3,1 mm,  
 Operating pressure 11 bar, Made in Germany + **2 m supply hose**

Material: ..... Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: ..... 11 bar

Temperature range: ..... +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: ..... 52 (incl. mount) x 45 x 23,5

Special note: ..... The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm  
 Screws and wall plugs for wall mounting are not included in the scope of delivery  
**Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)**

<b>Connection</b>	Male thread
Male thread mm	26,44
<b>Male thread</b>	<b>G3/4</b>
Capacity of 1/2" hose approx. m	25
Capacity of 5/8" hose approx. m	24
Capacity of 3/4" hose approx. m	15
Hose length approx. m	12,5
Weight approx. kg	18
PU units	1
<b>Article No.</b>	<b>42.9041.9</b>



Robust stainless steel construction




GEKA® plus rotary fitting with full 3/4" water flow



Gradual adjustment



Automatic roll-up of the hose



Locking mechanism can be controlled by pulling at the end of the hose



Gentle hose guide



## GEKA® plus automatic hose reel EA15GSK

Advantages / benefits: ..... Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel  
**Automatic roll-up of the hose** locks 2x per rotation  
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")  
 Gentle hose guide prevents the hose from jumping off the reel during reeling  
**Suitable for wall, floor and ceiling mounting**  
 Hose guide on the axle adjustable in three 45° steps  
**GEKA® plus rubber water hose 3/4" made of EPDM**, 5-layer with synthetic threads, ID 19 mm, wall thickness 4 mm, operating pressure 20 bar, Made in Germany  
**+ 2 m supply hose**

Material: ..... Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: ..... 20 bar

Temperature range: ..... +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: ..... 52 (incl. mount) x 45 x 23,5

Special note: ..... The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm  
 Screws and wall plugs for wall mounting are not included in the scope of delivery  
**Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)**



<b>Connection</b>	Male thread
Male thread mm	26,44
<b>Male thread</b>	<b>G3/4</b>
Capacity of 1/2" hose approx. m	25
Capacity of 5/8" hose approx. m	24
Capacity of 3/4" hose approx. m	15
Hose length approx. m	11
Weight approx. kg	20
PU units	1
<b>Article No.</b>	<b>42.9042.9</b>



Robust stainless steel construction



GEKA® plus rotary fitting with full 3/4" water flow



Gradual adjustment



Automatic roll-up of the hose



Locking mechanism can be controlled by pulling at the end of the hose



Gentle hose guide

## GEKA® plus automatic hose reel EA15KSK

Advantages / benefits: ..... Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel  
**Suitable for drinking water**  
**Automatic roll-up of the hose locks** 2x per rotation  
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")  
 Gentle hose guide prevents the hose from jumping off the reel during reeling  
**Suitable for wall, floor and ceiling mounting**  
 Hose guide on the axle adjustable in three 45° steps  
**With 20 m Rehau Rauaqua water hose 1/2" certified for drinking water**  
**GEKA® plus stainless quick couplings + 2 m supply hose, 42.9044.9 additional with GEKA® plus professional cleaning gun (23.1891.8)**

Material: ..... Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: ..... 20 bar

Temperature range: ..... +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: ..... 52 (incl. mount) x 45 x 23,5

Special note: ..... The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm  
 Screws and wall plugs for wall mounting are not included in the scope of delivery  
**Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)**

Connection	Male thread	Male thread
Male thread mm	26,44	26,44
<b>Male thread</b>	<b>G3/4</b>	<b>G3/4</b>
Capacity of 1/2" hose approx. m	25	25
Capacity of 5/8" hose approx. m	24	24
Capacity of 3/4" hose approx. m	15	15
Hose length approx. m	20	20
Weight approx. kg	17	18
PU units	1	1
<b>Article No.</b>	<b>42.9043.9</b>	<b>42.9044.9</b>



Robust stainless steel construction



GEKA® plus rotary fitting with full 3/4" water flow



Gradual adjustment



Automatic roll-up of the hose



Locking mechanism can be controlled by pulling at the end of the hose



Gentle hose guide



# Accessories for GEKA® plus automatic hose reels EA15

available now

## Wall mount for EA15, EA15SK, EA15GSK and EA15KSK

Advantages / benefits: ..... Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)  
 Compatible with the automatic hose reels EA15 (42.9040.9), EA15SK (42.9041.9), EA15GSK (42.9042.9) and EA15KSK (42.9043.9 and 42.9044.9)  
 Material: ..... Stainless steel



Swivelling angle degrees	165°
Weight approx. kg	2,6
PU units	1
<b>Article No.</b>	<b>42.9097.9</b>

## Supply hoses EA15SK, EA15GSK and EA15KSK



Hose connection set SK	
Hose size inches	3/4"
Hose ID mm	19
Hose outer diameter mm	24,8
Wall thickness mm	3,1
Approx. length m	2
Operating pressure at +20 °C bar	11
Bursting pressure at +20 °C bar	35
PU units	1
<b>Article No.</b>	<b>42.9080.9</b>

Hose connection set GSK	
Hose size inches	3/4"
Hose ID mm	19
Hose outer diameter mm	27
Wall thickness mm	4
Approx. length m	2
Operating pressure at +20 °C bar	20
Bursting pressure at +20 °C bar	60
PU units	1
<b>Article No.</b>	<b>42.9081.9</b>

Hose connection set KSK	
Hose size inches	1/2"
Hose ID mm	12,8
Hose outer diameter mm	18,8
Wall thickness mm	3
Approx. length m	2
Operating pressure at +20 °C bar	20
Bursting pressure at +20 °C bar	30
PU units	1
<b>Article No.</b>	<b>42.9082.9</b>

# GEKA® plus rain barrel connection set Design

available from February

## GEKA® plus rain barrel connection set Design 3/4"

Advantages / benefits: ..... **For installation at rain barrels;**  
 Ideal for use in gardens, on terraces, on balconies, for discerning design-orientated customers  
 Material: ..... Design tap and rain barrel connection: chrome-plated brass; threaded band: Teflon  
 Scope of delivery: ..... 1x rain barrel connection chromed, Design water tap 3/4" with grommet, 1x Sealing tape roll



Packaging	Single product in PE pouch with euro holes, packaging unit with blister strip
<b>for hole diameter mm</b>	34 - 37
Rain barrel connection male thread mm	33,25
Rain barrel connection male thread	<b>G1</b>
Rain barrel connection female thread mm	24,66
Rain barrel connection female thread	G3/4
Male thread at inlet mm	26,44
Male thread at inlet	G3/4
Male thread at outlet mm	33,25
Male thread at outlet	G1
Nominal width (NW) mm	19
Nominal size	3/4"
PU units	6
<b>Article No.</b>	<b>46.8126.8</b>




## GEKA® automatic wall-mounted hose box K25

Advantages / benefits: ..... **Automatic roll-up and comfortable unwinding** of hose without knotting; hose can be locked in any position;  
**Controlled and safe hose intake (slow retract);**  
**Tool-free** adjustable hose stopper;  
**Robust wall mount: 180° rotatable;**  
**incl. mounting kit** (4x dowels, 4x screws and 4x stainless steel washers);  
 with **anti-drip feature** for **supply hose** thanks to **practical plug-in option;**  
**Easily removable** from the wall bracket;  
**No unintentional swinging back and forth** of the hose box **thanks to Position Plus**  
 Water hose **phthalate-free**  
**Fully assembled and ready to use;**  
**Including** high quality, robust **push-fit connector system** and **spray nozzle** made from chrome-plated brass;


Operating pressure at +20 °C: ..... 8 bar  
 Temperature range: ..... +4 °C to +45 °C  
 Dimensions L x W x H cm: ..... 62 x 26 x 43 (incl. mount)  
 Scope of delivery: ..... GEKA® plus spray nozzle, light; GEKA® plus hose piece 1/2";  
 GEKA® plus hose piece 1/2" with water stop; GEKA® plus tap plug G3/4,  
 15 m hose + 2 m supply hose




<b>Hose size</b>	<b>1/2"</b>
Hose ID mm	12,5
Hose length approx. m	25
Approx. length supply hose m	2
PU units	1
<b>Article No.</b>	<b>42.8721.9</b>




Automatic roll-up




Infinitely variable locking mechanism




Incl. assembly kit and metal mount




Supply hose 2 m




can be adjusted without tools




Incl. push-fit connector system made of metal



Reduces unwanted swinging back and forth



Plug-in option for supply hose



180° rotatable



# GEKA® plus multi-sprayer 5S

available now

## GEKA® plus multi-sprayer 5S


Advantages / benefits: .....High quality robust multi-sprayer with 5 different spray patterns  
**Robust** and **durable** thanks to **high-quality metal components inside and outside** and GEKA® plus device plug made of chrome-plated brass  
**Permanent locking** with **one-hand operation** for convenient and permanent watering  
**Individual adjustment of the water flow rate using a regulating valve**  
 Ideal for **left- and right-handed** users as it can be operated from both sides  
**Simple** and **intuitive setting** of the spray patterns thanks to the position indicator and pictograms. Confirmation of the set position by click-in function  
**Fatigue-free** working thanks to **ergonomic** design  
**Pleasant feel** and **non-slip** thanks to **soft components** on the lever and handle  
**Easy cleaning** of the circuit board and valve through **Clean + Repair\***:  
 Tool-free access to the circuit board and valve set for maintenance and cleaning

Application: .....Shower: Ideal for watering planting areas and planters  
 Narrow shower: Particularly suitable for watering narrow beds and planters  
 Spray mist: The fine spray mist is particularly suitable for watering delicate and sensitive seedlings  
 Full jet: Ideal for filling containers or for cleaning tasks  
 Flat jet: the horizontal flat jet is ideal for watering hedges, but also for cleaning tasks

Material: .....Metal components: Shower head and body made of aluminium, plate made of stainless steel, GEKA® plus device plug and valve insert made from chrome-plated brass  
 Plastic components: Other components, lever and handle additionally overmoulded with TPE (soft grip)



Packaging	On card	EAN-flag
PU units	5	5
<b>Article No.</b>	<b>46.1000.8</b>	<b>46.1000.9</b>

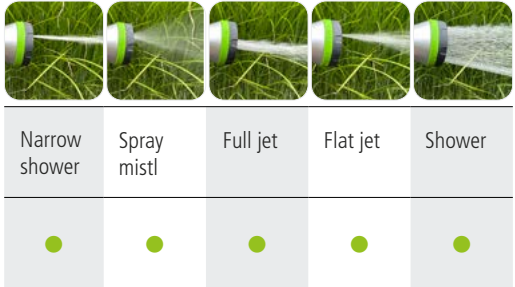

Inside + outside metal

Quantity regulation

Locking mechanism

Softgrip

Clean + Repair\*

\* Spare parts available





# GEKA® plus multi-sprayer 3S

available now

## GEKA® plus multi-sprayer 3S

Advantages / benefits: ..... High quality robust multi-sprayer with 3 different spray patterns  
**Robust and durable** thanks to **high-quality metal components inside and outside** and GEKA® plus device plug made of chrome-plated brass  
**Permanent locking** with **one-hand operation** for convenient and permanent watering  
**Individual adjustment of the water flow rate using a regulating valve**  
 Ideal for **left- and right-handed** users as it can be operated from both sides  
**Simple and intuitive setting** of the spray patterns thanks to the position indicator and pictograms. Confirmation of the set position by click-in function  
**Fatigue-free** working thanks to **ergonomic** design  
**Pleasant feel** and **non-slip** thanks to **soft components** on the lever and handle  
**Easy cleaning** of the circuit board and valve through **Clean + Repair\***:  
 Tool-free access to the circuit board and valve set for maintenance and cleaning

Application: ..... Shower: Ideal for watering planting areas and planters  
 Full jet: Ideal for filling containers or for cleaning tasks  
 Flat jet: the horizontal flat jet is ideal for watering hedges, but also for cleaning tasks

Material: ..... Metal components: Shower head and body made of aluminium, plate made of stainless steel, GEKA® plus device plug and valve insert made from chrome-plated brass  
 Plastic components: Other components, lever and handle additionally overmoulded with TPE (soft grip)

Packaging	On card	EAN-flag
PU units	5	5
<b>Article No.</b>	<b>46.1002.8</b>	<b>46.1002.9</b>



further information



Inside + outside metal

Quantity regulation

Locking mechanism

Softgrip

Clean + Repair\*

\* Spare parts available



# GEKA® plus water-sprayer 1S

available now

## GEKA® plus water-sprayer 1S

Advantages / benefits: .....High quality robust water-sprayer  
**Robust and durable** thanks to **high-quality metal components inside and outside** and GEKA® plus device plug made of chrome-plated brass  
**Permanent locking with one-hand operation** for convenient and permanent watering  
**Individual adjustment of the water flow rate using a regulating valve**  
 Ideal for **left- and right-handed** users as it can be operated from both sides  
**Fatigue-free** working thanks to **ergonomic** design  
**Pleasant feel and non-slip** thanks to **soft components** on the lever and handle  
**Easy cleaning** of the circuit board and valve through **Clean + Repair\***:  
 Tool-free access to the circuit board and valve set for maintenance and cleaning

Application: .....Shower: Ideal for watering planting areas and planters

Material: .....Metal components: Shower head and body made of aluminium, plate made of stainless steel, GEKA® plus device plug and valve insert made from chrome-plated brass  
 Plastic components: Other components, lever and handle additionally overmoulded with TPE (soft grip)



Packaging	On card	EAN-flag
PU units	5	5
<b>Article No.</b>	<b>46.1004.8</b>	<b>46.1004.9</b>

Inside + outside metal

Quantity regulation

Locking mechanism

Softgrip

Clean + Repair\*

\* Spare parts available

## Spare parts

available from May

### Spare parts for GEKA® plus Multi-sprayers

For Article No. 46.1000.8, 46.1000.9, 46.1002.8, 46.1002.9, 46.1004.8, 46.1004.9



Article No.	Designation
46.1020.8	GEKA plus sealing set



Article No.	Designation
46.1021.9	GEKA plus valve set



# GEKA® plus design water tap

available from  
February

## GEKA® plus design water tap

Advantages / benefits: ..... Design water tap with GEKA® plus connector plug  
**Maximum flexibility** due to external thread G3/4: usable with tap plug (Scope of delivery), grommet or claw coupling  
 Optimised water flow  
 Combinable with all common push-fit connector systems and hose types  
 Long-lasting and easy to use

Areas of application: ..... for garden, house, workshop, etc.



Male thread at inlet mm	20,95
<b>Male thread at inlet</b>	<b>G1/2</b>
Male thread at outlet mm	26,44
<b>Male thread at outlet</b>	<b>G3/4</b>
Packaging	On card
PU units	5
Covering box units	30
<b>Article No.</b>	<b>46.8125.8</b>

available  
now

# GEKA® plus water hoses WS400

## GEKA® plus water hoses WS400

Advantages / benefits: ..... 5-layer hose design, top quality materials  
**Additional coating to protect against damage and for excellent gliding properties**  
**Robust and long-lasting**  
 Very pressure-resistant and dimensionally stable  
 No twisting and warping, no kinking thanks to **Anti-Twist Technology (ATT)**  
 Very high flexibility and temperature resistance  
 Algae-free, weather- and UV-resistant  
 Phthalate-, PAH-free  
 REACH- and RoHS-compliant  
 20-year warranty\*

Material: ..... Core: high-quality grey PVC,  
 1st intermediate layer: anti-algae protective layer, black, PVC  
 2nd intermediate layer: support layer, grey, PVC  
 Middle layer: ATT (Anti-Torsion Technology) double fabric insert  
 Outer layer: high-quality, transparent PVC

Temperature range: ..... Approx. -20 °C to +60 °C

Colour: ..... Transparent grey with matt surface, with anthracite line and 2 green stripes

Areas of application: ..... Intensive use, heavy duty, garden centres, discerning garden owners etc.

Packaging: ..... With cardboard box-display disc and EAN code

Hose size inches	1/2"	1/2"	1/2"	5/8"	5/8"
Hose ID mm	13	13	13	15	15
Hose outer diameter mm	17	17	17	20	20
Wall thickness mm	2,4	2,4	2,4	2,6	2,6
Approx. length m	10	25	50	25	50
Operating pressure at +20 °C bar	16	16	16	13	13
Bursting pressure at +20 °C bar	50	50	50	39	39
PU units	1	1	1	1	1
<b>Article No.</b>	<b>13.0218.9</b>	<b>13.0210.9</b>	<b>13.0211.9</b>	<b>13.0212.9</b>	<b>13.0213.9</b>

Hose size inches	3/4"	3/4"	1"	1"
Hose ID mm	19	19	25	25
Hose outer diameter mm	24,2	24,2	32	32
Wall thickness mm	2,8	2,8	3,6	3,6
Approx. length m	25	50	25	50
Operating pressure at +20 °C bar	11	11	9	9
Bursting pressure at +20 °C bar	33	33	27	27
PU units	1	1	1	1
<b>Article No.</b>	<b>13.0214.9</b>	<b>13.0215.9</b>	<b>13.0216.9</b>	<b>13.0217.9</b>




\*more information on warranty conditions: <https://www.geka.de/en/guarantee>





**KARASTO** Armaturenfabrik Oehler GmbH  
Manfred-von-Ardenne-Allee 27  
71522 Backnang | Germany

 +49 7191 34 52 - 0

 +49 7191 34 52 - 100

 [info@geka.de](mailto:info@geka.de)

 [www.geka.de/en](http://www.geka.de/en)

The GEKA® brand is a registered trademark of KARASTO Armaturenfabrik Oehler GmbH, Germany.