



NEW PRODUCTS 2024

GEKA® plus automatic hose reel EA15

Advantages / benefits: Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel
Suitable for drinking water
Automatic roll-up of the hose locks 2x per rotation
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")
 Gentle hose guide prevents the hose from jumping off the reel during reeling
Suitable for wall, floor and ceiling mounting
 Hose guide on the axle adjustable in three 45° steps

Material: Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: Max. 20 bar (hose-dependent)

Temperature range: +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: 52 (incl. mount) x 45 x 23,5

Special note: The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm
 Screws and wall plugs for wall mounting are not included in the scope of delivery
Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9) and various supply hoses available separately as an accessory



Connection	Male thread
Male thread mm	26,44
Male thread	G3/4
Capacity of 1/2" hose approx. m	25
Capacity of 5/8" hose approx. m	24
Capacity of 3/4" hose approx. m	15
Weight approx. kg	14
PU units	1
Article No.	42.9040.9



Robust stainless steel construction



GEKA® plus rotary fitting and stainless steel pipe



Suitable for wall, floor and ceiling mounting

GEKA® plus automatic hose reel EA15SK

available
now

GEKA® plus automatic hose reel EA15SK

Advantages / benefits: Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel
Suitable for drinking water
Automatic roll-up of the hose locks 2x per rotation
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")
 Gentle hose guide prevents the hose from jumping off the reel during reeling
Suitable for wall, floor and ceiling mounting
 Hose guide on the axle adjustable in three 45° steps
With 12,5 m GEKA® plus water hose WS500 3/4", Wall thickness 3,1 mm, Operating pressure 11 bar, Made in Germany + **2 m supply hose**

Material: Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: 11 bar

Temperature range: +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: 52 (incl. mount) x 45 x 23,5

Special note: The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm
 Screws and wall plugs for wall mounting are not included in the scope of delivery
Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)

Connection	Male thread
Male thread mm	26,44
Male thread	G3/4
Capacity of 1/2" hose approx. m	25
Capacity of 5/8" hose approx. m	24
Capacity of 3/4" hose approx. m	15
Hose length approx. m	12,5
Weight approx. kg	18
PU units	1
Article No.	42.9041.9



Robust stainless steel construction



GEKA® plus rotary fitting with full 3/4" water flow



Gradual adjustment



Automatic roll-up of the hose



Locking mechanism can be controlled by pulling at the end of the hose



Gentle hose guide



GEKA® plus automatic hose reel EA15GSK

Advantages / benefits: Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel
Suitable for drinking water
Automatic roll-up of the hose locks 2x per rotation
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")
 Gentle hose guide prevents the hose from jumping off the reel during reeling
Suitable for wall, floor and ceiling mounting
 Hose guide on the axle adjustable in three 45° steps
GEKA® plus rubber water hose 3/4" made of EPDM, 5-layer with synthetic threads, ID 19 mm, wall thickness 4 mm, operating pressure 20 bar, Made in Germany + **2 m supply hose**

Material: Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: 20 bar

Temperature range: +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: 52 (incl. mount) x 45 x 23,5

Special note: The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm
 Screws and wall plugs for wall mounting are not included in the scope of delivery
Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)



Connection	Male thread
Male thread mm	26,44
Male thread	G3/4
Capacity of 1/2" hose approx. m	25
Capacity of 5/8" hose approx. m	24
Capacity of 3/4" hose approx. m	15
Hose length approx. m	11
Weight approx. kg	20
PU units	1
Article No.	42.9042.9



Robust stainless steel construction



GEKA® plus rotary fitting with full 3/4" water flow



Gradual adjustment



Automatic roll-up of the hose



Locking mechanism can be controlled by pulling at the end of the hose



Gentle hose guide

GEKA® plus automatic hose reel EA15KSK

Advantages / benefits: Robust, durable and rust-free **stainless steel** construction with **double-sided suspension** of the reel
Suitable for drinking water
Automatic roll-up of the hose locks 2x per rotation
 With individually positionable hose stopper for different hose sizes (1/2", 5/8", 3/4")
 Gentle hose guide prevents the hose from jumping off the reel during reeling
Suitable for wall, floor and ceiling mounting
 Hose guide on the axle adjustable in three 45° steps
With 20 m Rehau Rauaqua water hose 1/2" certified for drinking water
GEKA® plus stainless quick couplings + 2 m supply hose,
42.9044.9 additional with GEKA® plus professional cleaning gun (23.1891.8)

Material: Housing: made of robust, durable and rustproof stainless steel 1.4301, hose guide rollers, inlet pipe, locking mechanism (toothed washer, catch, spring, snap ring), GEKA® plus rotary fitting: stainless steel, hose stopper: black rubber

Operating pressure at +20 °C: 20 bar

Temperature range: +4°C to +60°C (hose-dependent)

Dimensions L x W x H cm: 52 (incl. mount) x 45 x 23,5

Special note: The automatic hose reel is laid out for 15 m 3/4" hoses with 25 mm or 25 m 1/2" hoses with an outer diameter of 17 mm
 Screws and wall plugs for wall mounting are not included in the scope of delivery
Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)

Connection	Male thread	Male thread
Male thread mm	26,44	26,44
Male thread	G3/4	G3/4
Capacity of 1/2" hose approx. m	25	25
Capacity of 5/8" hose approx. m	24	24
Capacity of 3/4" hose approx. m	15	15
Hose length approx. m	20	20
Weight approx. kg	17	18
PU units	1	1
Article No.	42.9043.9	42.9044.9



Robust stainless steel construction



GEKA® plus rotary fitting with full 3/4" water flow



Gradual adjustment



Automatic roll-up of the hose



Locking mechanism can be controlled by pulling at the end of the hose



Gentle hose guide



Accessories for GEKA® plus automatic hose reels EA15

available now

Wall mount for EA15, EA15SK, EA15GSK and EA15KSK

Advantages / benefits: Stainless steel swivelling wall mount 165° incl. connecting screws (42.9097.9)
 Compatible with the automatic hose reels EA15 (42.9040.9), EA15SK (42.9041.9), EA15GSK (42.9042.9) and EA15KSK (42.9043.9 and 42.9044.9)
 Material: Stainless steel



Swivelling angle degrees	165°
Weight approx. kg	2,6
PU units	1
Article No.	42.9097.9

Supply hoses EA15SK, EA15GSK and EA15KSK



Hose connection set SK	
Hose size inches	3/4"
Hose ID mm	19
Hose outer diameter mm	24,8
Wall thickness mm	3,1
Approx. length m	2
Operating pressure at +20 °C bar	11
Bursting pressure at +20 °C bar	35
PU units	1
Article No.	42.9080.9

Hose connection set GSK	
Hose size inches	3/4"
Hose ID mm	19
Hose outer diameter mm	27
Wall thickness mm	4
Approx. length m	2
Operating pressure at +20 °C bar	20
Bursting pressure at +20 °C bar	60
PU units	1
Article No.	42.9081.9

Hose connection set KSK	
Hose size inches	1/2"
Hose ID mm	12,8
Hose outer diameter mm	18,8
Wall thickness mm	3
Approx. length m	2
Operating pressure at +20 °C bar	20
Bursting pressure at +20 °C bar	30
PU units	1
Article No.	42.9082.9

GEKA® plus rain barrel connection set Design

available from February

GEKA® plus rain barrel connection set Design 3/4"

Advantages / benefits: **For installation at rain barrels;**
 Ideal for use in gardens, on terraces, on balconies, for discerning design-orientated customers
 Material: Design tap and rain barrel connection: chrome-plated brass; threaded band: Teflon
 Scope of delivery: 1x rain barrel connection chromed, Design water tap 3/4" with grommet, 1x Sealing tape roll



Packaging	Single product in PE pouch with euro holes, packaging unit with blister strip
for hole diameter mm	34 - 37
Rain barrel connection male thread mm	33,25
Rain barrel connection male thread	G1
Rain barrel connection female thread mm	24,66
Rain barrel connection female thread	G3/4
Male thread at inlet mm	26,44
Male thread at inlet	G3/4
Male thread at outlet mm	33,25
Male thread at outlet	G1
Nominal width (NW) mm	19
Nominal size	3/4"
PU units	6
Article No.	46.8126.8



GEKA® automatic wall-mounted hose box K25

Advantages / benefits: **Automatic roll-up and comfortable unwinding** of hose without knotting; hose can be locked in any position;
Controlled and safe hose intake (slow retract);
Tool-free adjustable hose stopper;
Robust wall mount: 180° rotatable;
incl. mounting kit (4x dowels, 4x screws and 4x stainless steel washers);
 with **anti-drip feature** for **supply hose** thanks to **practical plug-in option;**
Easily removable from the wall bracket;
No unintentional swinging back and forth of the hose box **thanks to Position Plus**
 Water hose **phthalate-free**
Fully assembled and ready to use;
Including high quality, robust **push-fit connector system** and **spray nozzle** made from chrome-plated brass;

Operating pressure at +20 °C: 8 bar
 Temperature range: +4 °C to +45 °C
 Dimensions L x W x H cm: 62 x 26 x 43 (incl. mount)
 Scope of delivery: GEKA® plus spray nozzle, light; GEKA® plus hose piece 1/2";
 GEKA® plus hose piece 1/2" with water stop; GEKA® plus tap plug G3/4,
 15 m hose + 2 m supply hose



Hose size	1/2"
Hose ID mm	12,5
Hose length approx. m	25
Approx. length supply hose m	2
PU units	1
Article No.	42.8721.9

Automatic roll-up

Infinitely variable locking mechanism

Incl. assembly kit and metal mount

Supply hose 2 m

can be adjusted without tools

Incl. push-fit connector system made of metal

Reduces unwanted swinging back and forth

Plug-in option for supply hose

180° rotatable



GEKA® plus multi-sprayer 5S

available now

GEKA® plus multi-sprayer 5S


Advantages / benefits:High quality robust multi-sprayer with 5 different spray patterns
Robust and **durable** thanks to **high-quality metal components inside and outside** and GEKA® plus device plug made of chrome-plated brass
Permanent locking with **one-hand operation** for convenient and permanent watering
Individual adjustment of the water flow rate using a regulating valve
 Ideal for **left- and right-handed** users as it can be operated from both sides
Simple and **intuitive setting** of the spray patterns thanks to the position indicator and pictograms. Confirmation of the set position by click-in function
Fatigue-free working thanks to **ergonomic** design
Pleasant feel and **non-slip** thanks to **soft components** on the lever and handle
Easy cleaning of the circuit board and valve through **Clean + Repair***:
 Tool-free access to the circuit board and valve set for maintenance and cleaning

Application:Shower: Ideal for watering planting areas and planters
 Narrow shower: Particularly suitable for watering narrow beds and planters
 Spray mist: The fine spray mist is particularly suitable for watering delicate and sensitive seedlings
 Full jet: Ideal for filling containers or for cleaning tasks
 Flat jet: the horizontal flat jet is ideal for watering hedges, but also for cleaning tasks

Material:Metal components: Shower head and body made of aluminium, plate made of stainless steel, GEKA® plus device plug and valve insert made from chrome-plated brass
 Plastic components: Other components, lever and handle additionally overmoulded with TPE (soft grip)



Packaging	On card	EAN-flag
PU units	5	5
Article No.	46.1000.8	46.1000.9

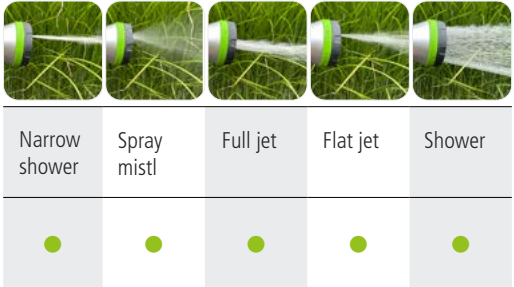

Inside + outside metal

Quantity regulation

Locking mechanism

Softgrip

Clean + Repair*

* Spare parts available



GEKA® plus multi-sprayer 3S

available now

GEKA® plus multi-sprayer 3S

Advantages / benefits: High quality robust multi-sprayer with 3 different spray patterns
Robust and durable thanks to **high-quality metal components inside and outside** and GEKA® plus device plug made of chrome-plated brass
Permanent locking with **one-hand operation** for convenient and permanent watering
Individual adjustment of the water flow rate using a regulating valve
 Ideal for **left- and right-handed** users as it can be operated from both sides
Simple and intuitive setting of the spray patterns thanks to the position indicator and pictograms. Confirmation of the set position by click-in function
Fatigue-free working thanks to **ergonomic** design
Pleasant feel and non-slip thanks to **soft components** on the lever and handle
Easy cleaning of the circuit board and valve through **Clean + Repair***:
 Tool-free access to the circuit board and valve set for maintenance and cleaning

Application: Shower: Ideal for watering planting areas and planters
 Full jet: Ideal for filling containers or for cleaning tasks
 Flat jet: the horizontal flat jet is ideal for watering hedges, but also for cleaning tasks

Material: Metal components: Shower head and body made of aluminium, plate made of stainless steel, GEKA® plus device plug and valve insert made from chrome-plated brass
 Plastic components: Other components, lever and handle additionally overmoulded with TPE (soft grip)

Packaging	On card	EAN-flag
PU units	5	5
Article No.	46.1002.8	46.1002.9



further information



Inside + outside metal

Quantity regulation

Locking mechanism

Softgrip

Clean + Repair*

* Spare parts available



GEKA® plus water-sprayer 1S

available now

GEKA® plus water-sprayer 1S

Advantages / benefits: High quality robust water-sprayer
Robust and durable thanks to **high-quality metal components inside and outside** and GEKA® plus device plug made of chrome-plated brass
Permanent locking with one-hand operation for convenient and permanent watering
Individual adjustment of the water flow rate using a regulating valve
 Ideal for **left- and right-handed** users as it can be operated from both sides
Fatigue-free working thanks to **ergonomic** design
Pleasant feel and non-slip thanks to **soft components** on the lever and handle
Easy cleaning of the circuit board and valve through **Clean + Repair***:
 Tool-free access to the circuit board and valve set for maintenance and cleaning

Application: Shower: Ideal for watering planting areas and planters

Material: Metal components: Shower head and body made of aluminium, plate made of stainless steel, GEKA® plus device plug and valve insert made from chrome-plated brass
 Plastic components: Other components, lever and handle additionally overmoulded with TPE (soft grip)



Packaging	On card	EAN-flag
PU units	5	5
Article No.	46.1004.8	46.1004.9

Inside + outside metal

Quantity regulation

Locking mechanism

Softgrip

Clean + Repair*

* Spare parts available

Spare parts

available from May

Spare parts for GEKA® plus Multi-sprayers

For Article No. 46.1000.8, 46.1000.9, 46.1002.8, 46.1002.9, 46.1004.8, 46.1004.9



Article No.	Designation
46.1020.8	GEKA plus sealing set



Article No.	Designation
46.1021.9	GEKA plus valve set



GEKA® plus design water tap

available from
February

GEKA® plus design water tap

Advantages / benefits: Design water tap with GEKA® plus connector plug
Maximum flexibility due to external thread G3/4: usable with tap plug (Scope of delivery), grommet or claw coupling
 Optimised water flow
 Combinable with all common push-fit connector systems and hose types
 Long-lasting and easy to use

Areas of application: for garden, house, workshop, etc.



Male thread at inlet mm	20,95
Male thread at inlet	G1/2
Male thread at outlet mm	26,44
Male thread at outlet	G3/4
Packaging	On card
PU units	5
Covering box units	30
Article No.	46.8125.8

available now

GEKA® plus water hoses WS400

GEKA® plus water hoses WS400

Advantages / benefits: 5-layer hose design, top quality materials
Additional coating to protect against damage and for excellent gliding properties
Robust and long-lasting
 Very pressure-resistant and dimensionally stable
 No twisting and warping, no kinking thanks to **Anti-Twist Technology (ATT)**
 Very high flexibility and temperature resistance
 Algae-free, weather- and UV-resistant
 Phthalate-, PAH-free
 REACH- and RoHS-compliant
 20-year warranty*

Material: Core: high-quality grey PVC,
 1st intermediate layer: anti-algae protective layer, black, PVC
 2nd intermediate layer: support layer, grey, PVC
 Middle layer: ATT (Anti-Torsion Technology) double fabric insert
 Outer layer: high-quality, transparent PVC

Temperature range: Approx. -20 °C to +60 °C

Colour: Transparent grey with matt surface, with anthracite line and 2 green stripes

Areas of application: Intensive use, heavy duty, garden centres, discerning garden owners etc.

Packaging: With cardboard box-display disc and EAN code

Hose size inches	1/2"	1/2"	1/2"	5/8"	5/8"
Hose ID mm	13	13	13	15	15
Hose outer diameter mm	17	17	17	20	20
Wall thickness mm	2,4	2,4	2,4	2,6	2,6
Approx. length m	10	25	50	25	50
Operating pressure at +20 °C bar	16	16	16	13	13
Bursting pressure at +20 °C bar	50	50	50	39	39
PU units	1	1	1	1	1
Article No.	13.0218.9	13.0210.9	13.0211.9	13.0212.9	13.0213.9

Hose size inches	3/4"	3/4"	1"	1"
Hose ID mm	19	19	25	25
Hose outer diameter mm	24,2	24,2	32	32
Wall thickness mm	2,8	2,8	3,6	3,6
Approx. length m	25	50	25	50
Operating pressure at +20 °C bar	11	11	9	9
Bursting pressure at +20 °C bar	33	33	27	27
PU units	1	1	1	1
Article No.	13.0214.9	13.0215.9	13.0216.9	13.0217.9




*more information on warranty conditions: <https://www.geka.de/en/guarantee>





KARASTO Armaturenfabrik Oehler GmbH
Manfred-von-Ardenne-Allee 27
71522 Backnang | Germany

 +49 7191 34 52 - 0

 +49 7191 34 52 - 100

 info@geka.de

 www.geka.de/en

The GEKA® brand is a registered trademark of KARASTO Armaturenfabrik Oehler GmbH, Germany.